


VTP-40-NE

CABLE PLACER

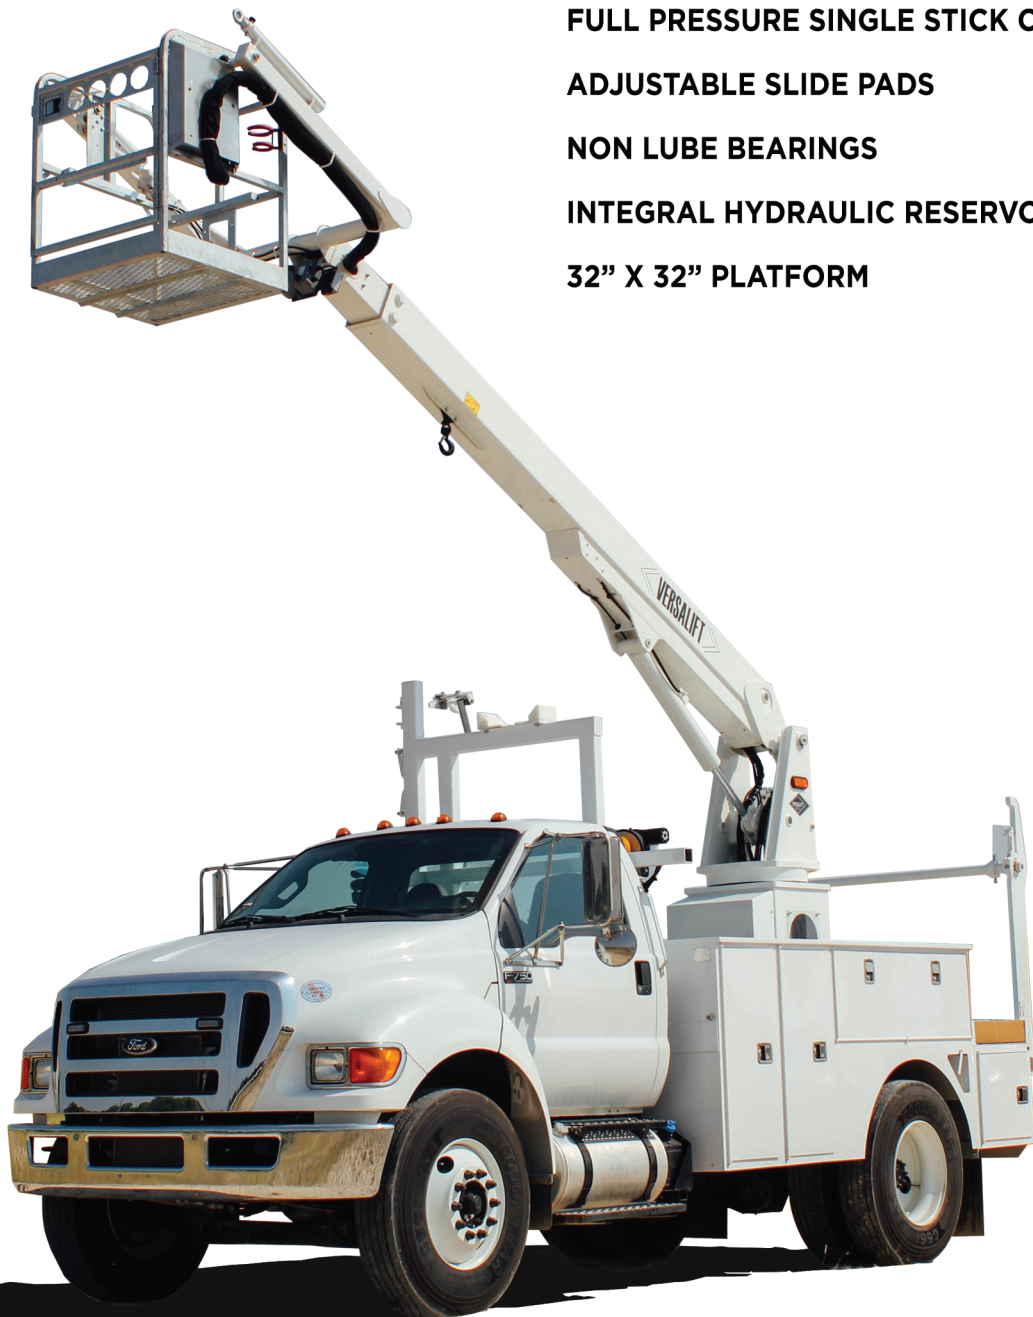

FULL PRESSURE SINGLE STICK CONTROLS

ADJUSTABLE SLIDE PADS

NON LUBE BEARINGS

INTEGRAL HYDRAULIC RESERVOIR

32" X 32" PLATFORM



The **VERSALIFT** product line has grown to encompass models for every market. Whether it be a 29' man lift or a 108' material handler, there is a **VERSALIFT** to get the job done.

For more information

Versalift
254.399.2100
www.VERSALIFT.com

VTP-40-NE

Cable Placer



GENERAL SPECIFICATIONS VTP-40-NE

Horizontal Reach	29 ft 7 in (9.0m)
Platform Capacity	500 lbs. (226 kg)
Cable Down Load Capacity	150 lbs. (68 kg.)
Total Unit Capacity	500 lbs. (226 kg.)
Side Pull Capacity (Fairlead retracted)	600 lbs. (270 kg)
Side Pull Capacity (Fairlead extended)	450 lbs. (200 kg)

OPTIONS:

- INTERCOM SYSTEM
- TOW LINE WINCH
- LIFT EYE
- REEL LIFT
- STRAND CARRIER
- TENSIONING BRAKE
- CAPSTAN WINCH
- BULL WHEEL CABLE GUIDE
- FAIR LEADS

WITH 40 IN. (1.02 M) TALL PEDESTAL (STANDARD)

Height to Bottom of Platform	35 ft. (10.7 m)
Working Height	40 ft. (12.2 m)
Stowed Travel Height	11 ft 6 in (3.5 m)
Weight of Lift	3,400 lbs. (1540 kg)

HYDRAULIC SYSTEM

Operating Pressure	2500 psi (175 kg/cm ²)
Flow Rate	12 gpm (45 lpm)
Filtration	10 micron Return
System Type	Closed Center
Power Source	PTO Pump

BOOM ACTION

Outer/Inner Boom Travel	minus 20 to +80 degrees
Inner Boom Extension	110 in (2.8 m)
Rotation	370° Non-Continuous