

VST-36/40/47/52-SI

Insulated Articulated/Telescopic Aerial Device

- **WORKING HEIGHT:** Up to 56 ft 2 in (17.1 m)
on Non-CDL Chassis
- **HORIZONTAL REACH:** Up to 31 ft 5 in (9.6 m)
- **PLATFORM CAPACITY:** Up to 450 lbs (204 kg)
- **JIB CAPACITY:** Up to 1000 lbs (454 kg)

**HANDHELD
REMOTE
CONTROL**
OPTIONAL

TrueGuard®
STANDARD



VST-52-SI model shown here.

VERSALIFT®

**LOWER TRUE
COST OF
OWNERSHIP**

VST-36/40/47/52-SI

Insulated Articulated/Telescopic Aerial Device



VST-36-SI

VST-40-SI

VST-47-SI

VST-52-SI

GENERAL SPECIFICATIONS:

(Based on 40 in Frame)

Horizontal Reach	26 ft 10 in (8.2 m)	30 ft 10 in (9.4 m)	31 ft 5 in (9.6 m)	30 ft 0 in (9.4 m)
Maximum Platform Capacity	450 lbs (204 kg)	450 lbs (204 kg)	400 lbs (181 kg)	400 lbs (181 kg)
Platform Rotation	100°	100°	100°	100°
Maximum Jib Capacity	1000 lbs (454 kg)	1000 lbs (454 kg)	1000 lbs (454 kg)	1000 lbs (454 kg)
Inner Boom Extension	79 in (2.0 m)	79 in (2.0 m)	103 in (2.6 m)	53 in (1.35 m)
Outer/Inner Boom Articulation	-25° to +85°	-25° to +85°	-25° to +85°	-25° to +85°
Lower Boom Articulation	0° to +87°	0° to +87°	0° to +84°	0° to +84°
Rotation	360° Continuous	360° Continuous	360° Continuous	360° Continuous

WITH STANDARD PEDESTAL:

Height to Bottom of Platform	36 ft (11.0 m)	40 ft (12.2 m)	46 ft 6 in (14.2 m)	51 ft 2 in (15.6 m)
Working Height	41 ft (12.5 m)	45 ft (13.7 m)	51 ft 6 in (15.7 m)	56 ft 2 in (17.1 m)
Stowed Travel Height	10 ft 6 in (3.2 m)	10 ft 6 in (3.2 m)	11 ft 0 in (3.4 m)	11 ft 6 in (3.5 m)

INSULATION GAP:


Upper Boom Fully Retracted	46 in (1.2 m)	41 in (1.0 m)	59 in (1.5 m)	59 in (1.5 m)
Lower Boom	12 in (305 mm)	12 in (305 mm)	12 in (305 mm)	12 in (305 mm)

HYDRAULIC SYSTEM:

Operating Pressure	3000 psi (207 bar)
Flow Rate	6 gpm (22.7 lpm)
Filtration	10 micron return 100 mesh suction
System Type	Open Center

OPTIONS:

- Automatic Boom Latch
- Backup 12-Volt Pump
- Insulated Line Lifting Attachment
- Second Set of Tool Power Ports
- Remote Lower Control
- Two-Speed Manual Throttle Control
- Hydraulic Jib Pole Extension
- Various Pedestal Heights
- Various Platforms, Covers and Liners
- Auxiliary Outriggers
- Lift Eye (1000 lb max)
- Platform Elevator

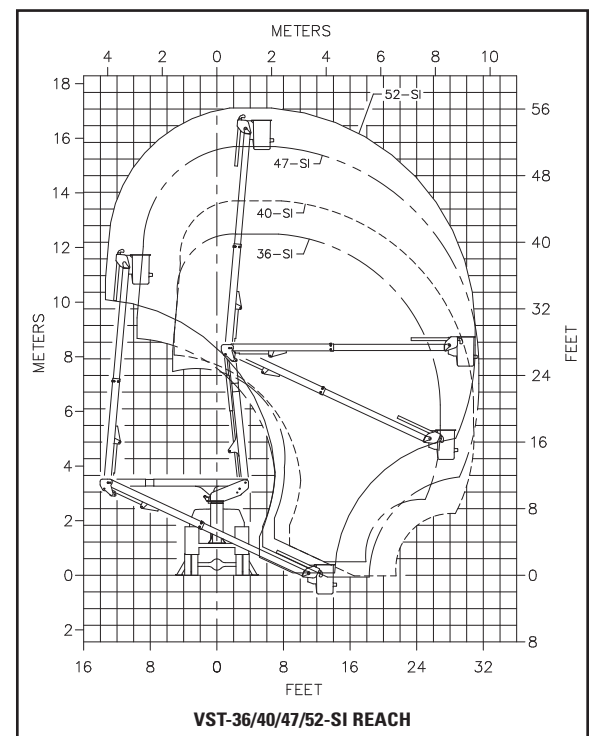

Note: Specifications on units may vary or change without prior notification due to option selections.

REV. 09/19

VERSALIFT is a leading manufacturer of bucket trucks, digger derricks and cable placers. Customers in the electric utility, telecommunications, forestry and sign, light & traffic industries experience a lower true cost of ownership by choosing Versalift. Our equipment is engineered to be lighter, while keeping the designs simple, which provides advantages like less unscheduled maintenance, greater payloads and ease of maintenance. Versalift has the lowest recall rate in the industry making it the smarter and most reliable choice. Versalift aerial lifts are the only units to feature the patented TruGuard® safety system, which provides additional protection to linemen in the bucket. Versalift is a Time Manufacturing Company, and together with Aspen Aerials has more than 1,000 employees worldwide.

REV. 03/19