

VST-36/40-AP

Articulated Telescopic Aerial Device

PLATFORM ROTATION: 180° Hydraulic

JIB CAPACITY: Up to 1000 lbs.

WORKING HEIGHT: Up to 45' 4"

HORIZONTAL REACH: Up to 30' 2"



The **VERSALIFT** product line has grown to encompass models for every market. Whether it be a 29' man lift or a 180' material handler, there is a **VERSALIFT** to get the job done.

For more information

Versalift
254.399.2100
www.VERSALIFT.com

VST-36/40-AP

Articulated Telescopic Aerial Device



GENERAL SPECIFICATIONS

(based on a 40" frame)

	VST-36-AP	VST-40-AP
Horizontal Reach	26' 2" (8.0 m)	30' 2" (9.2 m)
Maximum Platform Capacity	500 lbs. (272 kg)	500 lbs. (272 kg)
Platform Rotation	180°	180°
Maximum Jib Capacity	1000 lbs. (454 kg)	1000 lbs. (454kg)

HEIGHT WITH STANDARD PEDESTAL


Height to Bottom of Platform	36' 4" (11.1 m)	40' 4" (12.3 m)
Working Height	41' 4" (12.6 m)	45' 4" (13.8 m)
Stowed Travel Height	10' 6" (3.2 m)	10' 6" (3.2 m)

BOOM ACTION

Outer/Inner Boom Articulation	-25° to +85°	-25° to +85°
Inner Boom Extension	79" (2.0 m)	103" (2.6 m)
Lower Boom Articulation	0 to 87°	0 to 87°
Rotation	360°	360°

VEHICLE REQUIREMENTS

Cab to Axle (minimum)	60" (1.5 m)	84" (2.14 m)
GVWR	17,500 lbs. (7,940 kg)	17,500 lbs. (7,940 kg)

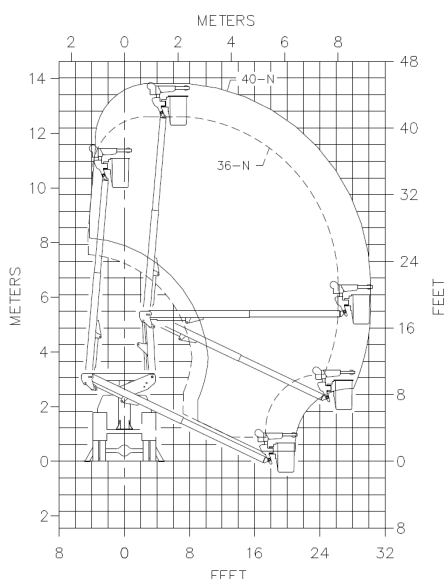

NOTE:

1. Specifications might vary without prior notification
2. Required GVWR can vary significantly with chassis, lift mounting location, service body, accessories, and desired payload

OPTIONS:

- Auxiliary Outriggers
- Second Set of Tool Power Ports
- Lifting Eye
- Backup Pump
- Two-Speed Manual Throttle Control
- Hydraulic Jib Pole Extension
- Various Pedestal Heights
- Hydraulic Jib/Winch (Reduces Platform Capacity 100 lbs.)