

VTP-40-NE

Cable Placer Non-Insulated

- **WORKING HEIGHT:**
40 ft (12.2 m)
- **HORIZONTAL REACH:**
29 ft 7 in (9.0 m)
- **PLATFORM CAPACITY:**
500 lbs (226 kg)



**FULL
PRESSURE**
HYDRAULIC SINGLE
STICK CONTROLS

**LARGE
PLATFORM**
32 IN X 32 IN

VTP-40-NE model shown here.

VERSALIFT®

**LOWER TRUE
COST OF
OWNERSHIP**

VTP-40-NE

Cable Placer Non-Insulated



GENERAL SPECIFICATIONS:

Horizontal Reach	29 ft 7 in (9.0 m)
Platform Capacity	500 lbs (226 kg)
Cable Down Load Capacity	150 lbs (68 kg)
Total Unit Capacity	500 lbs (226 kg)
Side Pull Capacity (Fairlead retracted)	600 lbs (270 kg)
Side Pull Capacity (Fairlead extended)	450 lbs (200 kg)
Outer/Inner Boom Travel	-20° to +80°
Inner Boom Extension	110 in (2.8 m)
Rotation	370° Non-Continuous


WITH 40 IN (1.02 M)

TALL PEDESTAL (Standard):

Height to Bottom of Platform	35 ft (10.7 m)
Working Height	40 ft (12.2 m)
Stowed Travel Height	11 ft 6 in (3.5 m)

HYDRAULIC SYSTEM:

Operating Pressure	2250 psi (155 bar)
Flow Rate	12 gpm (45 lpm)
Filtration	10 micron return 100 mesh suction

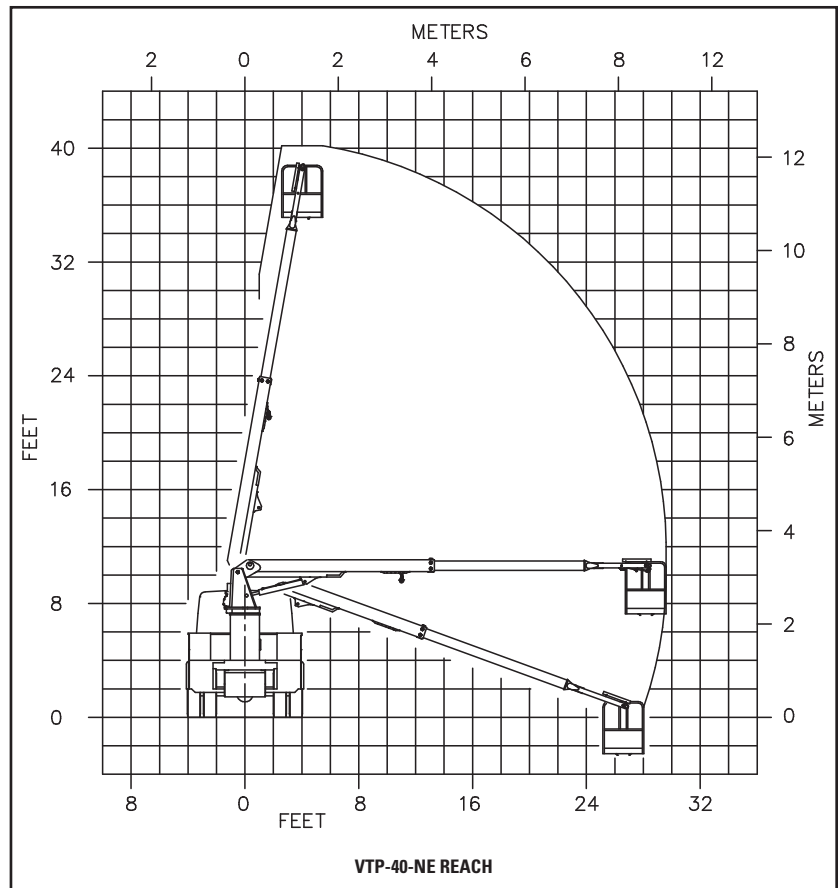

System Type	Closed Center
Power Source	PTO Pump

OPTIONS:

- Transferable Fairlead Support
- Rear Reel Drive
- Pendant Box Lower Controls
- Bull Wheel Cable Guide
- Reel Lift (6000 lb max)
- Lift Eye (2000 lb max) w/Lifting Chain
- Strand Tensioning Brakes
- Tow Line Winch with 70 ft Rope (21 m)
- Tool Trays
- Inverter for 110-Volt Power
- Strand Carrier (28 in wide/32 in dia)
- Reel Tensioning Brakes
- Intercom System
- 120-Volt GFCI Outlet at Platform
- Backup 12-Volt Pump
- Various Platform Fairlead Types
- Capstan Winch
- Hydraulic Tool Circuit at Ground
- Various Ropes
- Strand Drive

Note: Specifications on units may vary or change without prior notification due to option selections.

REV. 09/19

VERSALIFT is a leading manufacturer of bucket trucks, digger derricks and cable placers. Customers in the electric utility, telecommunications, forestry and sign, light & traffic industries experience a lower true cost of ownership by choosing Versalift. Our equipment is engineered to be lighter, while keeping the designs simple, which provides advantages like less unscheduled maintenance, greater payloads and ease of maintenance. Versalift has the lowest recall rate in the industry making it the smarter and most reliable choice. Versalift aerial lifts are the only units to feature the patented TruGuard® safety system, which provides additional protection to linemen in the bucket. Versalift is a Time Manufacturing Company, and together with Aspen Aerials has more than 1,000 employees worldwide.

REV. 03/19